



LINEAR DATA SHEET

SYSTEM: LINEAR | STYLE: OPEN

Wood planks that combine the natural beauty of wood with modern design to create an elegant product that enhances the architectural plan and allows for easy installation.



Linear Open is a monolithic feature ceiling system with cleanly defined linear runs spaced evenly to allow for sound absorption. The Linear Open ceiling system consists of random length planks installed sequentially via a Clip system, eliminating heavy metal framing and support typically required to suspend nailed-in-place boards. Planks are installed end-to-end with tongue & groove joints to create a continuous, monolithic appearance. Random length boards are furnished between 3' - 10'.

Linear Open is available in solid wood or veneer.



DESIGN

The linear clip is the attachment method utilized by Wood Grille, and is simple for installers. Clips are field attached to heavy-duty grid and are mechanically fastened to wood boards by the contractor. Primary access panels can be coordinated with MEP locations and cut in-field. In-factory cutouts can be achieved through coordination with the contractor, owner, architect, and Wood Grille engineering.



ACOUSTICS

Linear Open is manufactured with fiber felt spacers between wood boards for sound passage and has been tested in accordance with ASTM C-423, achieving an **NRC-0.55**.



SUSTAINABILITY

Linear Open contributes to sustainability initiatives like **WELL** and **LEED** through FSC compliance, NAF cores, and Indoor Advantage Gold certification.



FIRE PERFORMANCE

Linear Open can be treated to meet **Class A** as per ASTM E-84. Solid wood is treated with a finish additive. Veneers are applied to an FR (Fire Rated) core.



SEISMIC

Linear Open meets code compliance via **direct screw attachment** to heavy duty grid. Local code should be consulted to determine additional seismic requirements.

WOOD GRILLE

824 NEW PARK, ROAD
NEW PARK, PA 17352



888-634-2027



WOODGRILLE.COM



WOOD GRILLE

ARCHITECTURAL WOOD CEILING & WALL SYSTEMS

SPECIFICATION

COMPONENTS

HANGERS

#12-gauge wire hangers, braided wire, or aircraft cable (contractor-supplied).

SUSPENSION SYSTEM

Standard 15/16" Heavy Duty T-Grid are made from galvanized steel and are 12 feet long.

The clips are made of spring-steel, with phosphate pre-treatment and a corrosion-resistant coating.

The loose clips are provided by Wood Grille as part of the system.

SYSTEM PROFILES & DIMENSIONS

Wood boards are 3/4" [19 mm] thick, with widths determined by the module selected.


Standard board widths/modules are as follows:

M (MODULE) ¹	4" (S) ²	4"	4-1/2"	6"
W (WIDTH)	3-1/4"	3-3/4"	3-3/4"	5-1/4"
R (REVEAL)	3/4"	1/4"	3/4"	3/4"
T (THICKNESS)	3/4"			
L (LENGTH)	RL ³			
C (CONNECTION)	TONGUE & GROOVE			

¹ Custom - Custom sizes available

² S - Slim module manufactured with 3-1/4" wide slats

³ RL - Random lengths (x) where 3' ≤ x ≤ 10'

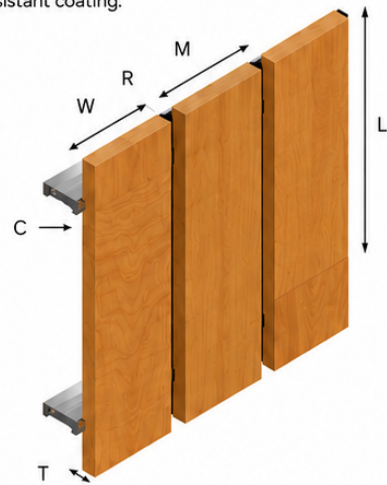

SPACERS

Fiber felt is factory-applied to one edge of each wood board, offering a closed plenum for more efficient air movement and dust containment. The fiber felt spacer provides a fire retardant closure and is black.

Black ABS spacers, 1/8" [3mm] thick, may be substituted for the fiber felt as required.

The ABS profile is commonly referred to as a Linear Open with a hardboard spacer.

INSTALLATION

ATTACHMENT

Linear Open Boards install end-to-end using a tongue & groove joint followed by compression into a contractor provided and installed 15/16" Heavy Duty T-Grid system.

SPECIAL CONDITIONS

Ceiling termination at a wall or soffit is accomplished using Wood Grille perimeter trim #101.

The standard perimeter for floating ceilings is Linear boards, turned 90° and pin-nailed into ceiling boards.



824 NEW PARK, ROAD
NEW PARK, PA 17352



888-634-2027



WOODGRILLE.COM



WOOD GRILLE

— ARCHITECTURAL WOOD CEILING & WALL SYSTEMS —

SPECIFICATION

WOOD SELECTIONS

WOOD SPECIES

Linear Open may be specified in a variety of wood species. Current standard wood species are: Ash, Maple, Red Oak, White Oak, Beech, Poplar, and Cherry. Thermally Modified® wood species are also available. Premium veneers and non-wood laminates are available.

TEXTURES

Standard surface texture is smooth-sawn. Faces are sanded.

FINISHES

WOOD FINISHES

Standard finishes include 20-sheen clear (satin) and 5-sheen clear (matte). A full range of standard colors are available. Custom stains, opaque or semi-transparent colors are also available. All finishes are water based, low VOC-emitting, and do not contain solvents.

SHIPPING & STORAGE

SHIPPING

Linear Open is shipped on skids in shrink wrap packaging. Finished surfaces are facing one another with slip sheets between to prevent marring.

STORAGE

Linear Open shall be stored flat and level, in a fully enclosed space away from sunlight or moisture. For a minimum of seventy-two (72) hours immediately prior to ceiling installation, the packaging shall be opened and the panels shall be stored in the room in which they will be installed. The temperature and humidity of the room shall closely approximate those conditions that will exist when the building is occupied. Panels must be stored off the floor.

COORDINATION

TEMPERATURE & HUMIDITY

Linear Open shall be installed only when the temperature and humidity closely approximate the interior conditions that will exist when the building is occupied. Heating and cooling systems shall be operating before, during, and after installation, with the humidity of the interior spaces maintained between 25 and 55 percent, and a temperature between 60 to 90 degrees F.



824 NEW PARK, ROAD
NEW PARK, PA 17352



888-634-2027



WOODGRILLE.COM



WOOD GRILLE

— ARCHITECTURAL WOOD CEILING & WALL SYSTEMS —

SPECIFICATION


NOTES

SPECIAL NOTES

- The Integrated Lighting program at Wood Grille is an effort to coordinate MEPs more effectively and provide a more streamlined process of integration. In practice, this effort begins with factory cutouts to accommodate light fixtures.
- The Linear Clip is a mechanical fastener that utilizes barbed inserts pressed into grooves in the backs of the wood boards creating positive attachment. The clips are made of spring-steel with phosphate pre-treatment and corrosion-resistant coating.
- Primary Access Panels are sections of a system that have been removed and assembled into a lift & shift panel for required-access locations.
- Thermally modified wood has been altered by a controlled process called pyrolysis which induces chemical changes to the cellular structure of the cell wall components of the wood material through heat to increase durability, shrink/swell factor, and biological resistance.

TYPICAL DETAILS


12 GA HANGERS STANDARD 4' [1219mm] O.C. / 6" [152mm] FROM END

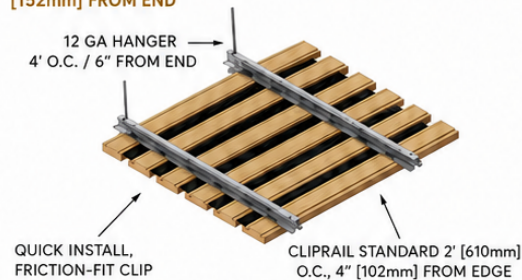


WALL, BEAM OR SOFFIT

WALL, BEAM OR SOFFIT


PERIMETER TRIM #101

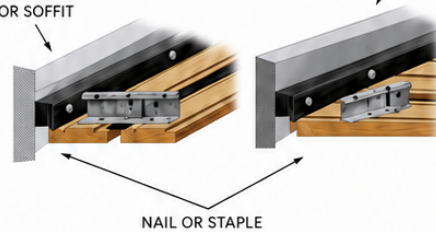

1/16" [2mm] STEEL STRIP, NAIL, OR WIRE AT ALL TONGUE & GROOVE JOINTS

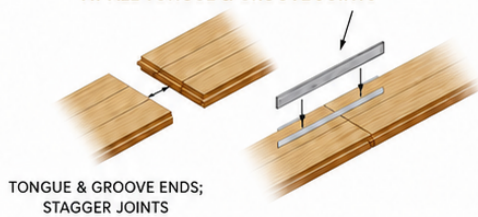

APPLY PRESSURE UNTIL PLANK POSITIVELY SECURES TO CLIPRAIL

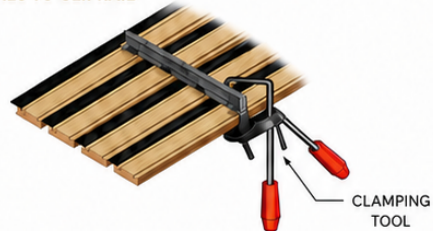

824 NEW PARK, ROAD
NEW PARK, PA 17352



888-634-2027



WOODGRILLE.COM